

INTI-CAM77B-T1

Surveillance Camera



1080P

OUTPUT

H. 265

VIDEO COMPRESSION

ONVIF



MOBILE

Applicable to buildings, supermarkets, hotels, banks, road, warehouse, underground parking lot, bar, pipeline, garden and other dark or lightless environment, which require HD image place, suitable for backlighting environment.

PT Industri Telekomunikasi Indonesia (Persero)

✉ info@inti.co.id

Kantor Pusat

Jl. Moch. Toha No.77
Bandung 40253
Tlp : (022) 5201501
Fax : (022) 5202444

Kantor Cabang

Jl. Balitung 1 No.17 (Senopati)
Jakarta Selatan 12110

Fasilitas Produksi



Jl. Moch. Toha No. 225
Bandung
Tlp : (022) 5206510

Kontak :

Features

- Use the built-in deep learning algorithm of human shape and car shape, suitable for traffic statistics
- Only human or vehicle detection and analysis, other moving objects will not be affected by detection
- Support target counting, electronic fence, retrograde detection, off-site detection
- Support to calculate the statistics of import and export persons and vehicle flow
- Support to view daily/monthly report statistics and report to export
- Support Smart IR to prevent infrared overexposure at night
- ICR infrared filter automatic switch, to achieve real day and night monitoring
- Support corridor mode and add longitudinal and narrow monitoring areas in the environment
- Support multi-line OSD, font, size, color, position adjustable
- Support 3D digital noise reduction and TWDR
- Support automatic electronic shutter function, adapt to different monitoring environment
- Support a variety of intelligent alarm linkage output
- Support GB28181 access, support Onvif access
- Support Email, FTP and NTP services
- Supports HTTPS encrypted transport
- Change the password when starting the initial equipment to ensure the security of the password
- Support two-way voice intercom
- Support 2-way alarm input / 1-way alarm output

Dimensi

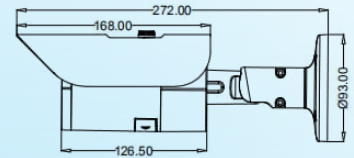

Wire Interface



1. Audio Input
2. Power Input
3. Network Interface
4. RS485/ Alarm Output
5. Alarm Input
6. Audio Output





Specification

Camera

Image Sensor	: 1/2.8"SONY 2.07MP progressive scan Exmor CMOS
Min. illumination	: 0Lux/F1.4 (IR on) color: 0.01Lux/F1.4, B/W:0.001Lux/F1.4
IR Distance	: 40-50M (3*array IR leds)
Electronic Shutter	: Auto/ Manual(1/25-1/10000), FLK
Day/Night	: ICR switch, auto, color, B/W, ext
Lens	: 2.8-12mm motorized lens (2.8-12mm DC ICR lens optional)
Lens Interface	: § 14
Auto IRIS	: DC drive
S/N Ratio	: ≥50db (AGC OFF)
Output	: PAL/NTSC adjustable
WDR	: WDR(Off/Low/Middle/High)
Light Board Control	: Auto/ Manual/Off
3D N/R	: Off/ Low/ Middle/ High/ Higher
Defog	: Off/ Low/ Middle/ High
Mirror	: Off/ Horizontal/ Vertical/ 180° rotation/ Corridor mode (90° rotation, 270° rotation)
Slow Shutter	: /
Exposure Control	: Auto/ Manual
Image Setting	: Brightness, Contrast, Saturation, Sharpness, Hue

Audio/Video Encoding

Video Compression	: H.265/ H.264
H.265 Encoding	: Main Profile
H.264 Encoding	: BaseLine/Main Profile/High Profile
Encoding Features	: NTSC: main stream: 1920×1080@30fps, sub-stream: D1@30fps PAL: main stream: 1920×1080@25fps, sub-stream: D1@25fps
Max. Resolution	: 1920X1080
Video Bit Rate	: Constant bit rate, variable bit rate (16kbps-8000kbps)
Video Type	: Complex stream/ Video stream
Audio Compression	: G.711u
Audio Bit Rate	: 64Kbps
Audio Control	: Support input/output volume gain control
ROI	: Support 4 zones, multi-stage level
Watermark function	: /

Network

Network Protocol	: TCP/IP, UDP, HTTP, DHCP, RTSP, DDNS, NTP, PPPoE, UPnP, SMTP, FTP
Access Protocol	: ONVIF, GB28181 (optional)
Browser	: Support IE, Chrome, Firefox, Safari

Video Preview Meanwhile

Video Preview Meanwhile	: 8
User Permission	: User add/modify/delete, permission management
Safe Mode	: Authorized user name and password, HTTPS encryption and AES link encryption, RTSP verification
Motion Detection	: Set detection zone, Multi-level sensitivity can be set
Tampering Alarm	: 1 zone
Privacy Mask	: 4 zones
Intelligent Analysis	: Target Counting, Left/Loss, Area Detection, Line Crossing
Sound Alarm Output	: Customize the broadcast language content and broadcast times (1-10 times)
Event Linkage	: Snapshot, TF card video, FTP upload or Email sending, alarm output linkage, preset linkage
Multicast Function	: Support
ANR	: Support, match with NVR
Mobile Surveillance	: Support Apple, Android
Device Exception Detection	: Support network disconnected, IP conflict, illegal access alarm
OSD	: Title, time and date overlay, multi-line OSD, OSD color optional
DST	: Support
Snapshot	: Support snapshot, snapshot resolution is encoding resolution
System Update	: Support remote update

Interface

Network Interface	: RJ45 10M/100M network adaptive
Analog Video Output	: 1CH 1.0Vp-p Composite video output
Audio	: Line input/ output
Alarm Input	: 2CH input
Alarm Output	: 1CH output
Reset	: Support
RS485	: Support
TF Card	: Support Max 128G, Micro SD(SDHC /SDXC) card local-storage

General

Operating Temperature	: -20°C ~ 55°C
Operating Humidity	: 0% - 90%
Protection Grade	: IP66/ IK09
Power Supply	: DC12V /PoE optional
Power Consumption (Max)	: <8W
Dimensions (mm)	: 272(W)*93(H)*95.5(L)

